




AISLADORES TIPO LINE POST

Distribution post insulators

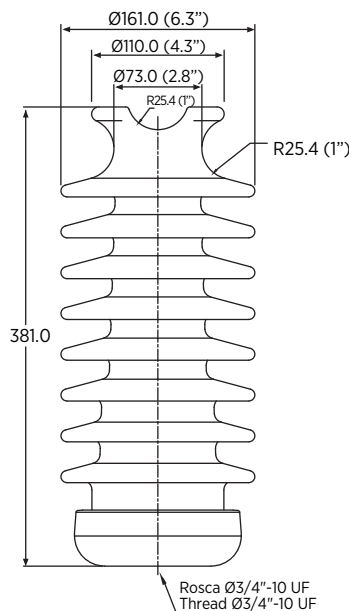

8415

NÚMERO DE CATÁLOGO	8415
Clase ANSI C29.7	57-3
DISTANCIAS CRÍTICAS, mm	
Distancia de arco	311
Distancia de fuga	750
VALORES MECÁNICOS, kN	
Resistencia al cantilever	12.5
VALORES ELÉCTRICOS	
Voltaje típico de aplicación	45
Flameo de baja frecuencia en seco	135
Flameo de baja frecuencia en húmedo	100
Flameo crítico al impulso positivo	214
RADIO INFLUENCIA	
Voltaje de prueba RMS a tierra, kV	30
RIV máximo a 1,000 kHz, μ V	200
DATOS DE EMPAQUE	
Peso neto por unidad, kg	8.30

Nota 1: Dimensiones en mm (pulgadas).

Nota 2: Carga máxima de trabajo recomendada 40% de la resistencia al cantilever.

Nota 3: Esmalte café o esmalte gris ANSI 70.

Nota 4: Cuello "F"

CATALOG NUMBER	8415
Clase ANSI C29.7	57-3
CRITICAL DISTANCE, mm	
Dry arcing distance	311
Leakage distance	750
MECHANICAL VALUES, kN	
Cantilever strength	12.5
ELECTRICAL VALUES, kV	
Typical application voltage	45
Low-frequency dry flashover	135
Low-frequency wet flashover	100
Critical impulse flashover, negative	214
RADIO INFLUENCE VOLTAGE DATA	
Low-frequency test voltage, RMS to ground	30
Maximum RIV at 1,000 KHz, μ V	200
PACKING DATA	
Net weight, kg	8.30

Note 1: Dimensions in mm (in)

Note 2: Maximum recommended working load: 40% of cantilever withstand load.

Note 3: ANSI 70 gray is standard. Brown or white available by requested.

Note 4: "F" Neck