




LINE POST POLIMÉRICO CABEZA CERÁMICA

Hybrid line post insulator

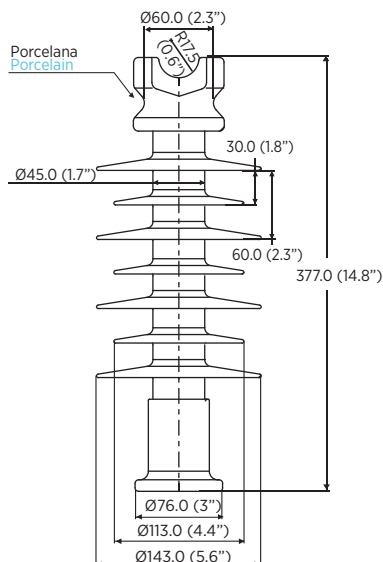

PL0350H11

NÚMERO DE CATÁLOGO

PL0350H11

DISTANCIAS CRÍTICAS, mm

Distancia de arco	305
Distancia de fuga	815

VALORES ELÉCTRICOS, kV

Voltaje nominal	35
Flameo de baja frecuencia en seco	130
Flameo de baja frecuencia en húmedo	95
Flameo crítico al impulso positivo	210
Flameo crítico al impulso negativo	230

VALORES MECÁNICOS, kN

SCL	12.4
MDCL	6.0
STL	13.3

RADIO INFLUENCIA

Voltaje de prueba RMS a tierra kV	10
RIV máximo a 1,000 kHz, μ V	4

DIMENSIONES SEGÚN ESQUEMA

Tamaño nominal de la rosca	3/4"
----------------------------	------

Nota: Medidas en mm (pulgadas).

Cubierta: Silicona "high voltage" vulcanizada a alta temperatura.

Herrajes: Acero galvanizado en caliente.

CATALOG NUMBER

PL0350H11

CRITICAL DISTANCES, mm

Arcing distance	305
Leakage distance	815

ELECTRICAL VALUES, kV

Rated voltage	35
Low-frequency dry flashover	130
Low-frequency wet flashover	95
Critical impulse flashover, positive	210
Critical impulse flashover, negative	230

MECHANICAL VALUES, kN

SCL	12.4
Maximum design cantilever load	6.0
Tensile strength	13.3

RADIO INFLUENCE VOLTAGE DATA

Low-frequency test voltage, RMS to ground, kV	10
Maximum RIV at 1,000 kHz, μ V	4

DIMENSIONS ACCORDING TO DRAWING

Center hole nominal thread size	3/4"
---------------------------------	------

Note: Dimensions in mm (in).

Housing: High voltage silicone - High temperature vulcanized (HTV).

Fittings: Hot dip galvanized steel.