




DESCARGADOR DE SOBRETENSIÓN POLIMÉRICO

Polymer surge arresters

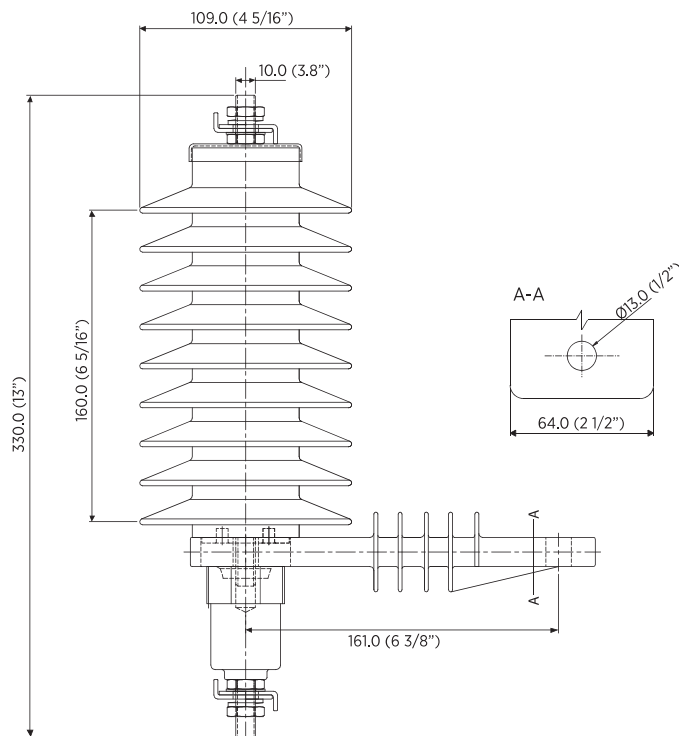

NÚMERO DE CATÁLOGO		PY015001			
Clase		1			
DISTANCIAS CRÍTICAS, mm					
Distancia de arco		220			
Distancia de fuga		644			
VALORES MECÁNICOS					
Resistencia al cantilever		1,133N			
Resistencia a la tensión		3,000N			
Torque máximo		78Nm			
Peso		4.45kg			
VALORES ELÉCTRICOS					
Voltaje nominal (U_r)		15kV			
MCOV		12.75kV			
Corriente de descarga normal		10kA			
Impulso de corriente (4/10 μ s)		100kA			
Impulso soportado tipo rayo		128kV			
Tensión de flameo en húmedo		62kV			
Tensión de flameo en seco		78kA			
Voltaje residual a impulso tipo rayo (8/20 μ s)		5kA	10kA	20kA	40kA
		45.36kV	49.41kV	54.54kV	61.83kV

Nota 1: Medidas en mm

CATALOG NUMBER		PY015001			
Class		1			
CRITICAL DISTANCE mm					
Arcing distance		220			
Leakage distance		644			
MECHANICAL VALUES					
Cantiliver strength		1,133N			
Strength tension		3,000N			
Maximum torque		78Nm			
Weight		4.45kg			
ELECTRICAL VALUES					
Rated voltage (Ur)		15kV			
MCOV		12.75kV			
Normal discharge current		10kA			
High current impulse (4/10µs)		100kA			
Lightning impulse		128kV			
Power frequency voltage (Wet)		62kV			
Power frequency voltage (Dry)		78kA			
Residual voltage (8/20µs)		5kA	10kA	20kA	40kA
		45.36kV	49.41kV	54.54kV	61.83kV

Note 1: Dimensions in mm (in)